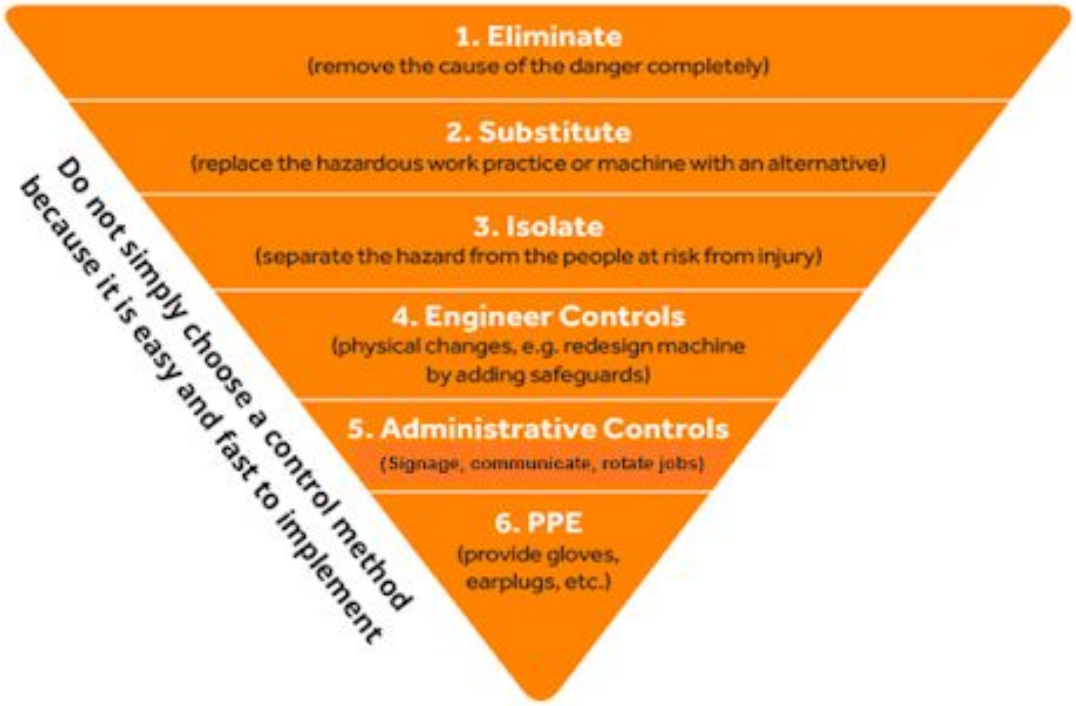
1. Eliminate
(remove the cause of the danger completely)
2. Substitute
(replace the hazardous work practice or machine with an alternative)
3. Isolate
(separate the hazard from the people at risk from injury)
4. Engineer Controls
(physical changes, e.g. redesign machine by adding safeguards)
5. Administrative Controls
(Signage, communicate, rotate jobs)
6. PPE
(provide gloves, earplugs, etc.)
Do not simply choose a control method because it is easy and fast to implement